



Wall cabinets

The wall cabinets are ideal for installing voice and data networks, active equipment and structured cabling components for telecommunications networks, and we want our 19" is completely

attached, whether distribution panels data network, delivery of voice etc. To satisfy all needs, Monolyth has 19" wall cabinets with different sizes and capacities, from cabinets

6U to 18U murals, funded by 450 or 600 mm, single or double body and body wall 10" 6U. All kinds of quality solutions at competitive prices to SMEs, domestic installations with small

spaces and small size, network systems, educational systems, broadcasting and telecommunications systems, as well as the installation of small precision equipment.

Key Features

- **Wallmount cabinet** rack with standard profile width of 10" or 19" with accessories, design and quality finish.
- **Front door with tempered** glass safety of 4 mm safety and security and openness locked.
- **In dual cabinet body**, rear door with reversible hinge and opening security key.
- **Removable side panels** for easy opening with side zipper.
- **Check wiring** for the panel and the lower base.
- **Adjustable** mounting rails*.
- **Placeable** in both wall and floor.
- **Complies with Policy** CE and RoHS environmental standards.

Technical specifications

- **Treatment:** degreasing and phosphate anti-rust paint.
- **Degree of protection:** IP20. - **Capacity:** 60 Kg
- **Thickness of steel:** Rails 2.0 mm | 1.5 mm angles, other 1.2 mm.
- **Material:** SPCC steel laminate.
- **Color:** Black RAL 9004 smooth finish.

Included accessories

- 1 fixed tray.
- 1 set of side brackets*.
- One ceiling fan 120 mm*.
- Mounting hardware included and set of keys for locks.

Wall cabinets models available:


- **Single body Heights:** 6U, 9U, 12U, 15U and 18U.
- **Body double Heights:** 6U, 9U, 12U and 15U.
- **Body 1:** Funds 450 and 600 mm.
- **Body Double:** 550 mm. funds.
- **Wall cabinet** 10" 6U.

Certificates

Meets standards:
ANSI / EIA RS-310-D, DIN41491 PART1, DIN41491 pART7, ETSI standard supports 19 "International Standard, RoHS Directive 2002/95/EC, EN 60439-3:1991 + A1: 1994 C: 1994 + A2: 2001 + AC: 2005 + AC: 2009, EN 60439-1:1999 + A1: 2004.

* The wall cabinet 10" incorporates neither adjustable mounting rails or side brackets, and ceiling fans.

20CATALOGUE 14PRODUCT

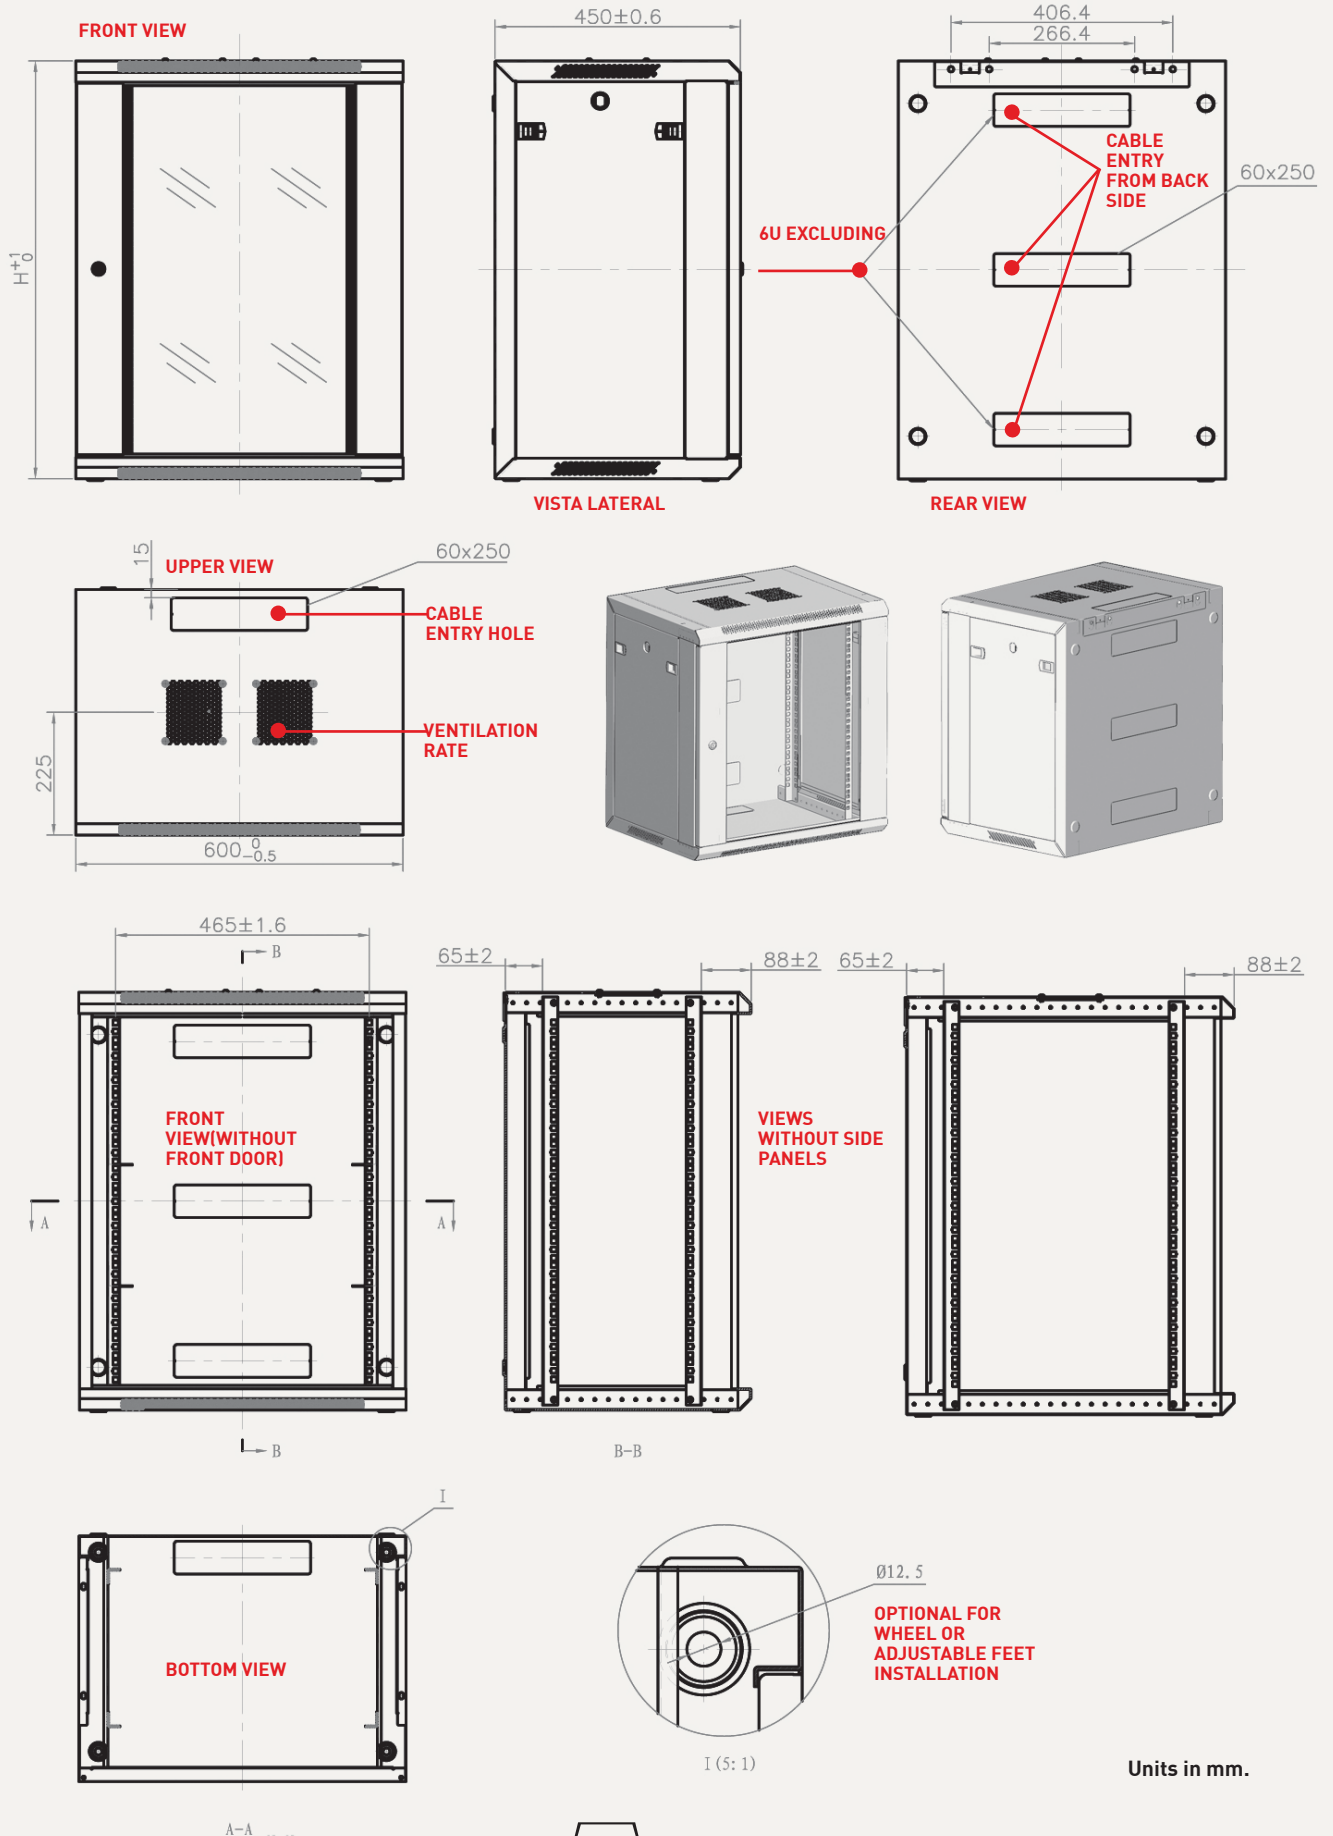

WALLMOUNT CABINETS

Ideal for installing networks voice and data equipment and assets structured cabling elements for telecommunication networks.



10" WALLMOUNT CABINET

Code	Height	Model	Measures *
200000	6U	SH1006	330 x 310

19" WALLMOUNT DOUBLE SECTION

Code	Height	Model	Measures *
203000	6U	ZH6406	600 x 550
203010	9U	ZH6409	600 x 550
203020	12U	ZH6412	600 x 550
203030	15U	ZH6415	600 x 550

19" WALLMOUNT CABINET

Code	Height	Model	Measures *
201000	6U	WM6406	600 x 450
201010	9U	WM6409	600 x 450
201020	12U	WM6412	600 x 450
201030	15U	WM6415	600 x 450
202000	6U	WM6606	600 x 600
202010	9U	WM6609	600 x 600
202020	12U	WM6612	600 x 600
202030	15U	WM6615	600 x 600
202040	18U	WM6618	600 x 600

U=45 mm.

***Units in mm.**

